


The Lira Light Column RGBW LED color changing column luminaire blends beauty, design, color and expression into a single powerful luminaire or color rotations are Red, Green, Blue and White. Color temperatures for pure White are now available in Warm (3000K), Neutral (4000K) and Cool (5000K) lumens. All selections can have duration of time set for each color to achieve exciting transitions - each color beautifully blending into the next programmed color (DMX Controller required for RGB).

Enjoy creating various lighting effects for all different applications or can be continuous warm, neutral, or cool white for an even glow. These columns can be conveniently programmed with other facade or fountain fixtures. This color-changing across all fixtures effect can be identically coordinated and timed, creating a multi-level fusion of light that will enhance any project design.

The standard heights of the Lira Light Column can range from 3 to 17 feet. Its column uses a polycarbonate lens, which is reinforced by integral tubing that creates a wireway for connection of top side and bottom side LEDs. Optional shields for lenses are available.



**STAR POWER™ OPTICAL SYSTEM**

The Star Power™ reflector is an excellent system which provides great value and performance.

Project Name:

Type:

Cat #	Light Dist.	Wattage / Lens Ht.	Kelvin	Volts	Base Height	Mounting	Color	Options
Lira Light Column 6" OD <b>(LIR-6)</b>	Symmetric <b>(SYM)</b>	22W / 1' Lens <b>(22)</b>	3000K <b>(30K)</b> <i>Warm</i>	120-277 <b>(UNV)</b>	2' <b>(2)</b>	Anchor Base <b>(AB)</b>	Bronze <b>(BRZ)</b>	GFI Kit <b>(GFI)</b>
Lira Light Column 8" OD <b>(LIR-8)</b>		44W / 2' Lens <b>(44)</b>	4000K <b>(40K)</b> <i>Neutral</i>		4' <b>(4)</b>		White <b>(WHT)</b>	Banner Arms <b>(BA)</b>
		66W / 3' Lens <b>(66)</b>	5000K <b>(50K)</b> <i>Cool</i>		6' <b>(6)</b>		Silver <b>(SVR)</b>	
		88W / 4' Lens <b>(88)</b>	RGBW <b>(RGB)</b>		7' <b>(7)</b>		Hunter Green <b>(HGN)</b>	
		*LIR-6 max len ht. 110W / 5' Lens <b>(110)</b>			8' <b>(8)</b>		Black <b>(BLK)</b>	
					10' <b>(10)</b>		Graphite <b>(GPH)</b>	
					*LIR-6 max base ht. 12' <b>(12)</b>		Grey <b>(GRY)</b>	
							Custom <b>(CS)</b>	

## PRODUCT SPECIFICATIONS

**Housing:** Aluminum Housing 600 Series

**LED:** Lumileds Luxeon MX. CRI 70

**Optics:** Symmetrical

**Watts:** 22-110

**Driver:** 0-10V Dimming driver as standard by Philips Advance

THD @ Max Load < 15%

Power Factor @ Max Load < 0.95

**Kelvin:** 3000, 4000, 5000, or RGBW




**Finish:** 5 mils Powder Coat

**Warranty:** Standard Warranty is 5 years for Driver and LEDs

## PRODUCT DIMENSIONS

LIRA LIGHT COLUMN - LUMEN DATA CHART			
PART NUMBER	LUMENS	Lm/W	WATTS
LIR-X-SYM-22-30K	2863	130	22
LIR-X-SYM-22-40K	2892	131	22
LIR-X-SYM-22-50K	3037	138	22
LIR-X-SYM-44-30K	5726	130	44
LIR-X-SYM-44-40K	5784	131	44
LIR-X-SYM-44-50K	6073	138	44
LIR-X-SYM-66-30K	8590	130	66
LIR-X-SYM-66-40K	8676	131	66
LIR-X-SYM-66-50K	9110	138	66
LIR-X-SYM-88-30K	11453	130	88
LIR-X-SYM-88-40K	11568	131	88
LIR-X-SYM-88-50K	12147	138	88
LIR-X-SYM-110-30K	14316	130	110
LIR-X-SYM-110-40K	14461	131	110
LIR-X-SYM-110-50K	15184	138	110

DIMENSION	LIR-6	LIR-8
<b>A</b>	3-14 FT	3-17 FT
<b>B</b>	2-10 FT	2-12 FT
<b>C</b>	1-4 FT	1-5 FT

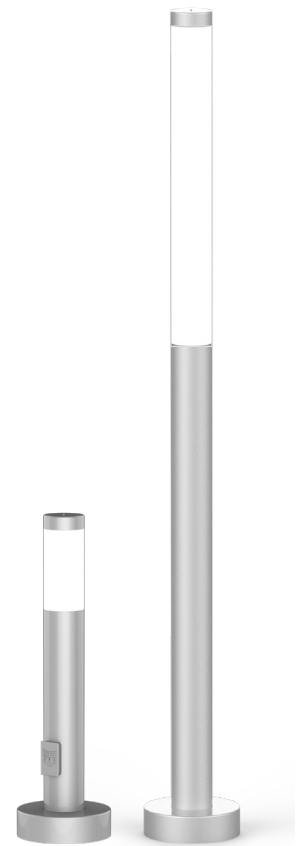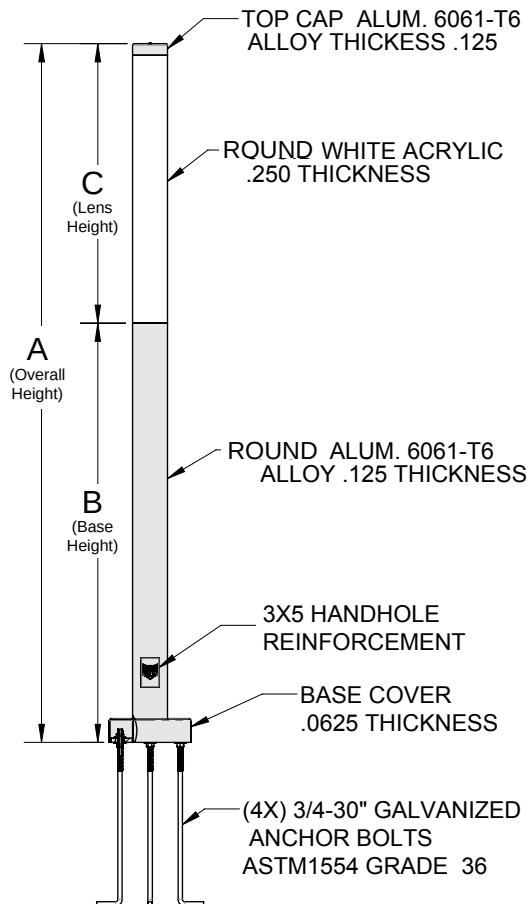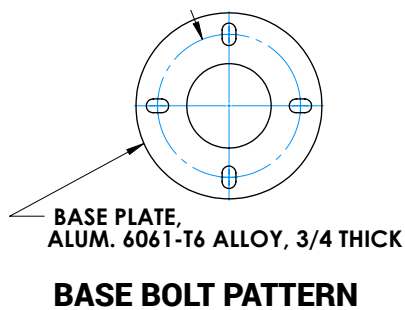

LIRA is available as short as 3 feet and up to 17 feet tall