


Flow is a full cutoff wall scone available from 18 to 106 watts. This low profile scone "flows" nicely with any architectural project to create a bold and sleek design. It is available with title 24 options to meet the stringent criteria for energy savings. Using the best and newest LED and electronic driver technology, the Flow is a popular choice for any project where both a sleek design and new technology are needed.

The Flow is cast aluminum with die formed aluminum parts, CNC machined and tooled for precision. The optical system is full cutoff anti-glare Star Power made of proprietary 95% miro reflective material.

The Flow comes standard with a 0-10v dimming driver with a power factor of >90. Recommended for replacing up to 250 watts of HID with savings of 70% or more with virtually zero maintenance.



STAR POWER™ OPTICAL SYSTEM

The Star Power™ reflector is an excellent system which provides great value and performance.

LED WATTAGE CHART

	16L	32L	48L
350 milliamps	18w	33w	51w
530 milliamps	28w	54w	80w
700 milliamps	36w	71w	104w
1050 milliamps	56w	106w	-

FLW-1

FLW-2

Project Name:

Type:

Cat #	Light Dist	# of LEDs	Milliamps	Kelvin	Volts	Mounting	Color	Options
Flow-1 (FLW-1)	Type 4 (T4)	FLW-1 16 (16L) 32 (32L)	350 (35) 530 (53)	3000K (30K) 4000K (40K)	120-277 (UNV)	Wall Mount (WM)	Bronze (BRZ) White (WHT) Silver (SVR)	Surge Protector (10K) Polycarbonate Lens (PL)
Flow-2 (FLW-2)		FLW-2 32 (32L) 48 (48L)	700 (7) 1050 (1) <i>*16L-32L Only</i>	5000K (50K)			Hunter Green (HGN) Black (BLK) Graphite (GPH) Grey (GRY) Custom (CS)	Photo Cell (PC) <i>*Universal Voltage 120-277</i> Emergency Battery Back-Up (EB)


PRODUCT SPECIFICATIONS

Housing: Cast Aluminum / CNC Die formed

LED: Luxeon M Series by Lumileds

Optics: Star Power Optics

Watts: 18 - 106

Electrical: UL 1598 Listed 

Driver: 0-10V Dimmable driver by Philips Advance


Kelvin: 3000K, 4000K and 5000K

Finish: 5 mils Powder Coat

Hardware: Stainless Steel

Warranty: Standard Warranty is 5 years for Driver and LEDs

PRODUCT DIMENSIONS

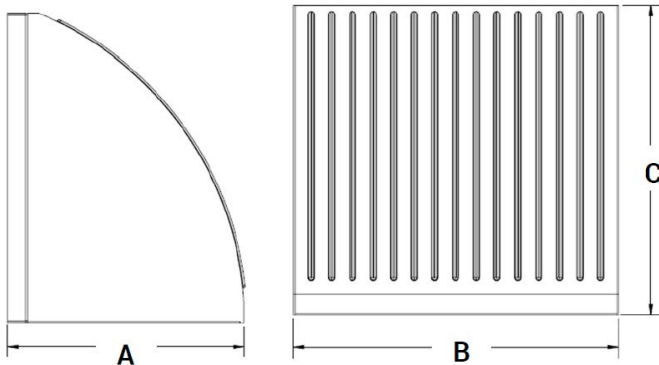

Luminaire	A	B	C
FLW-1	9 in	11 in	8 in
FLW-2	11.48 in	15 in	9.27 in

FLOW - LUMEN DATA CHART

PART NUMBER	T4 Lumens	T4 LM/W	Watts
FLW-1-16L-35-30K	1512	84	18
FLW-1-16L-35-40K	1566	87	18
FLW-1-16L-35-50K	1620	90	18
FLW-1-16L-53-30K	2352	84	28
FLW-1-16L-53-40K	2436	87	28
FLW-1-16L-53-50K	2520	90	28
FLW-1-16L-7-30K	3024	84	36
FLW-1-16L-7-40K	3132	87	36
FLW-1-16L-7-50K	3240	90	36
FLW-1-16L-1-30K	4704	84	56
FLW-1-16L-1-40K	4872	87	56
FLW-1-16L-1-50K	5040	90	56
FLW-1-32L-35-30K	2772	84	33
FLW-1-32L-35-40K	2871	87	33
FLW-1-32L-35-50K	2970	90	33
FLW-1-32L-53-30K	4536	84	54
FLW-1-32L-53-40K	4698	87	54
FLW-1-32L-53-50K	4860	90	54
FLW-1-32L-7-30K	5964	84	71
FLW-1-32L-7-40K	6177	87	71
FLW-1-32L-7-50K	6390	90	71
FLW-2-32L-35-30K	2772	84	33
FLW-2-32L-35-40K	2871	87	33
FLW-2-32L-35-50K	2970	90	33
FLW-2-32L-53-30K	4536	84	54
FLW-2-32L-53-40K	4698	87	54
FLW-2-32L-53-50K	4860	90	54
FLW-2-32L-7-30K	5964	84	71
FLW-2-32L-7-40K	6177	87	71
FLW-2-32L-7-50K	6390	90	71
FLW-2-32L-1-30K	8904	84	106
FLW-2-32L-1-40K	9222	87	106
FLW-2-32L-1-50K	9540	90	106
FLW-2-48L-35-30K	4284	84	51
FLW-2-48L-35-40K	4488	88	51
FLW-2-48L-35-50K	4743	93	51
FLW-2-48L-53-30K	6720	84	80
FLW-2-48L-53-40K	7040	88	80
FLW-2-48L-53-50K	7440	93	80
FLW-2-48L-7-30K	8736	84	104
FLW-2-48L-7-40K	9152	88	104
FLW-2-48L-7-50K	9672	93	104

