NV-1-ASA

AREA LIGHTING

FORM AND FUNCTION

- Sleek, low profile housing
- Spec grade performance
- Engineered for optimum thermal management
- Low depreciation rate
- Reduces energy consumption and costs up to 65%
- Exceeds IES foot candle levels utilizing the least number of poles and fixtures per project
- Optical system designed for:
  - Parking Lots
  - Auto Dealerships
  - General Area Lighting

CONSTRUCTION

- Die Cast Aluminum
- External cooling fins, Finite Element Analysis (FEA) designed
- Corrosion resistant external hardware
- One-piece silicone gasket ensures IP-65 seal for electronics compartment
- One-piece Optics Plate™ mounting silicone Micro Optics
- Two-piece silicone Micro Optic system ensures IP-67 level seal around each PCB
- Grade 2 Clear Anodized Optics Plate™ standard

FINISH

- 3-5 mils electrostatic powder coat.
- NLS' standard high-quality finishes prevent corrosion protects against and extreme environmental conditions

WARRANTY

Five-year limited warranty for drivers and LEDs.

LISTINGS

- Certified to UL 1598
- UL 8750
- CSA C22.2 No. 250.0
- DesignLights Consortium® (DLC)
- DesignLights Consortium Premium® (DLCP)
- IP65/ IP67 Rated
- 3G Vibration Rated per ANSI C136.31-2010

LED WATTAGE CHART

	16L	32L	48L	64L
350 milliamps	18w	-	-	-
530 milliamps	28w	-	-	-
700 milliamps	36w	71w	104w	136w
1050 milliamps	56w	106w	156w	205w

Project Name:

Type:

Cat #	Light Dist.	No. of LEDs	Milliamps	Kelvin	Volts	Mounting	Color	Options
NV Size 1 **(NV-1)**	Type 2 **(T2)** Type 3 **(T3)** Type 4 **(T4)** Type 5 **(T5)** Nema 2 24° Narrow Beam **(N2)** Nema 3 30° Narrow Beam **(N3)**	16 **(16L)** 32 **(32L)** 48 **(48L)** 64 **(64L)**	350 **(35)** 530 **(53)** 700 **(7)** 1050 **(1)**	3000K **(30K)** 4000K **(40K)** 5000K **(50K)**	120-277 **(UNV)** 347-480 **(HV)**	Architectural Sweep Arm **(ASA)**	Bronze **(BRZ)** White **(WHT)** Silver **(SVR)** Black **(BLK)** Graphite **(GPH)** Grey **(GRY)** Custom **(CS)**	Bird Deterrant **(BD)** Marine Grade Finish **(MGF)** Optic Plate Painted to Match Fixture **(OPP)** Nema 7-Pin Receptacle **(PE7)** Photocell + Receptacle **(PCR)** Receptacle + Shorting Cap **(PER)** FSP-211 with Motion Sensor (UNV Voltage) **(FSP-20)** **9'-20' Heights* **(FSP-40)** **21'-40' Heights* Surge Protector **(10K)** Round Pole Adaptor 3"- 4" Pole **(RPA4)** Round Pole Adaptor 5"- 6" Pole **(RPA5)** Rotated Optic Left **(ROL)** Rotated Optic Right **(ROR)** Automotive House Side Shield **(AHS)** House Side Shield **(HSS)** **HSS not applicable with N2 - NEMA 24° Optics* **HSS not applicable with N3 - NEMA 30° Optics*

ELECTRICAL

- 120-277 Volts (UNV) or 347-480 Volts (HV)
- 0-10V dimming driver by Philips Advance
- Driver power factor at maximum load is ≥ .95, THD maximum load is 15%
- All internal wiring UL certified for 600 VAC and 105°C
- All drivers, controls, and sensors housed in enclosed IP-65 compartment
- Lumileds Luxeon MX LED's
- CRI >70
- Color temperatures: 3000K, 4000K, 5000K

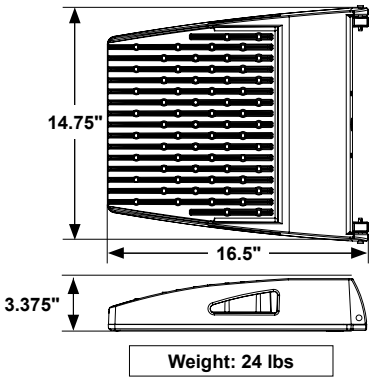

Weight: 24 lbs

OPTIONS

- **BIRD DETERRANT (BD)**—offers effective and humane deterrent for larger bird species and provides cost-effective long-term solution to nuisance bird infestations and protect your property.
- **MARINE GRADE FINISH (MGF)**—A multi-step process creating protective finishing coat against harsh environments.
  - Chemically washed in a 5 stage cleaning system.
  - Pre-baked
  - Powder coated 3-5 mils of Zinc Rich Super Durable Polyester Primer.
  - 1-2 feet inside pole coverage top and bottom.
  - Oven Baked.
  - Finished Powder Coating of Super Durable Polyester Powder Coat 3-5 mil thickness.
- **SHIELDS (HSS, AHS)**—House Side Shield (HSS) is designed for full property line cut-off. Automotive House Side Shield (AHS) is a single-sided shield allowing partial cut-off on either side or front of luminaire.
- **ROUND POLE ADAPTER (RPA)–** When using round poles, specify Round Pole Adapter (RPA). Specify RPA4 when installing on 3"-4" round poles, and RPA5 when installing on 5"-6" round poles.

RPA4 / RPA5

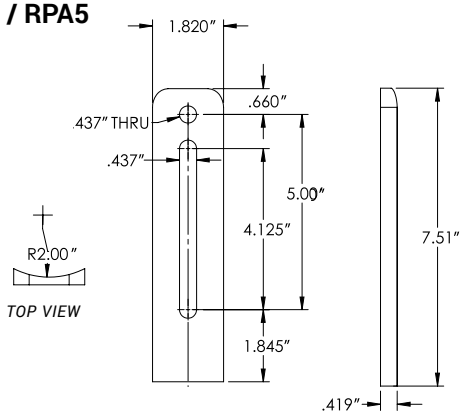

CONTROLS

- **FSP-211 (FSP-X)**—Passive infrared (PIR) sensor providing multi-level control based on motion/daylight contribution.
  - All control parameters adjustable via wireless configuration remote storing and transmitting sensor profiles.
  - FSP-20 mounting heights 9-20 feet
  - FSP-40 mounting heights 21-40 feet.
  - Includes 5 dimming event cycles, 0-10V dimming with motion sensing, reprogrammable in the field.
- **NEMA 7-PIN RECEPTACLE (PE7)**—An ANSI C136.41-2013 receptacle provides electrical and mechanical interconnection between photo control cell and luminaire. Dimming receptacle available two or four dimming contacts supports 0-10 VDC dimming methods or Digital Addressable Lighting Interface (DALI), providing reliable power interconnect.

HOUSE SIDE SHIELD



AUTOMOTIVE HOUSE SIDE SHIELD



FSP-211



OPTICS

Silicone optics high photothermal stability and light output provides higher powered LEDs with minimized lumen depreciation LED life. UV and thermal stability with scratch resistance increases exterior application durability.

- IES Types

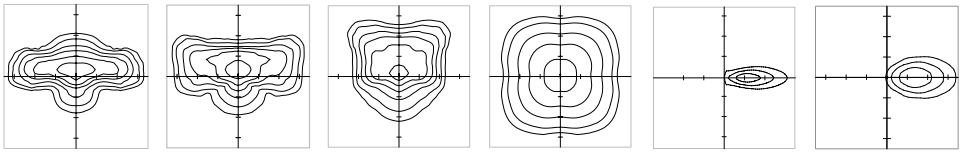

TYPE II (T2) TYPE III (T3) TYPE IV (T4) TYPE V (T5) NEMA 2 (N2) NEMA 3 (N3)

NLS LIGHTING
701 Kingshill Place, Carson, CA 90746
Call Us Today (310) 341-2037
nlslighting.com

OPTICAL CONFIGURATIONS

Rotatable Optics (ROR) Rotated Right, (ROL) Rotated Left options available. Optics field and factory rotatable.

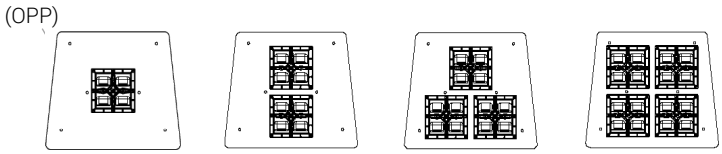

NV-1 / 16L **NV-1 / 32L** **NV-1 / 48L** **NV-1 / 64L**

*** OPTIC PLATE PAINTED TO MATCH FIXTURE FINISH (OPP)**– Optic Plate standard clear anodized, Grade 2. When (OPP) specified, Optic Plate finish will match fixture finish.

LUMENS

PART NUMBER	N2	LM/W	BUG	N3	LM/W	T2	LM/W	DLC	BUG	T3 HSS	LM/W	BUG	T3	LM/W	DLC	BUG	T4 HSS	LM/W	BUG	T4	LM/W	DLC	BUG	T5	LM/W	DLC	BUG	W
NV-1-16L-35-30K	1944	108	B2-U0-G0	2016	112	2209	117	P	B1-U0-G1	1134	63	B0-U0-G0	2106	117	P	B1-U0-G1	1116	62	B0-U0-G0	2187	116	P	B1-U0-G1	2124	118	P	B2-U0-G0	18
NV-1-16L-35-40K	2016	112	B2-U0-G0	2088	116	2268	126	P	B1-U0-G1	1206	67	B0-U0-G0	2286	127	P	B1-U0-G1	1188	66	B0-U0-G0	2250	125	P	B1-U0-G1	2304	128	P	B2-U0-G0	18
NV-1-16L-35-50K	2088	116	B2-U0-G0	2160	120	2376	132	P	B1-U0-G1	1278	71	B0-U0-G0	2394	133	P	B1-U0-G1	1260	70	B0-U0-G0	2358	131	P	B1-U0-G1	2412	134	P	B2-U0-G2	18
NV-1-16L-53-30K	3024	108	B3-U0-G1	3136	112	3192	114	P	B1-U0-G1	1764	63	B0-U0-G1	3220	115	P	B1-U0-G1	1736	62	B0-U0-G1	3119	113	P	B1-U0-G1	3248	116	P	B2-U0-G1	28
NV-1-16L-53-40K	3136	112	B3-U0-G1	3248	116	3472	124	P	B1-U0-G1	1876	67	B0-U0-G1	3472	124	P	B1-U0-G1	1848	66	B0-U0-G1	3444	123	P	B1-U0-G1	3500	125	P	B2-U0-G1	28
NV-1-16L-53-50K	3248	116	B2-U0-G1	3360	120	3612	129	P	B1-U0-G1	1988	71	B0-U0-G1	3640	130	P	B1-U0-G1	1960	70	B0-U0-G1	3584	128	P	B1-U0-G1	3668	131	P	B2-U0-G1	28
NV-1-16L-7-30K	3888	108	B3-U0-G1	4032	112	3960	110	P	B1-U0-G1	2268	63	B0-U0-G1	3960	110	P	B1-U0-G1	2232	62	B0-U0-G1	3973	109	P	B1-U0-G1	3996	111	P	B3-U0-G1	36
NV-1-16L-7-40K	4032	112	B3-U0-G1	4176	116	4428	123	P	B1-U0-G1	2412	67	B0-U0-G1	4284	119	P	B1-U0-G1	2376	66	B0-U0-G1	4212	117	P	B1-U0-G1	4320	120	P	B3-U0-G1	36
NV-1-16L-7-50K	4176	116	B3-U0-G1	4320	120	4644	129	P	B1-U0-G1	2556	71	B0-U0-G1	4500	125	P	B1-U0-G1	2520	70	B0-U0-G1	4428	123	P	B1-U0-G1	4500	125	P	B3-U0-G1	36
NV-1-16L-1-30K	6048	108	B3-U0-G1	6272	112	6160	110	S	B1-U0-G1	3528	63	B0-U0-G1	6384	114	P	B1-U0-G1	3472	62	B0-U0-G1	6232	112	P	B1-U0-G1	6440	115	P	B3-U0-G1	56
NV-1-16L-1-40K	6272	112	B3-U0-G1	6496	116	6832	122	P	B1-U0-G1	3752	67	B0-U0-G1	6888	123	P	B2-U0-G2	3696	66	B0-U0-G1	6776	121	P	B2-U0-G2	6944	124	P	B3-U0-G2	56
NV-1-16L-1-50K	6496	116	B4-U0-G1	6720	120	7168	128	P	B1-U0-G2	3976	71	B0-U0-G1	7224	129	P	B2-U0-G2	3920	70	B0-U0-G1	7112	127	P	B2-U0-G2	7280	130	P	B3-U0-G2	56
NV-1-32L-7-30K	7668	108	B4-U0-G1	7952	112	7810	110	S	B1-U0-G2	4473	63	B0-U0-G1	7810	110	S	B2-U0-G2	4402	62	B0-U0-G1	7739	109	S	B2-U0-G2	7881	111	S	B3-U0-G2	71
NV-1-32L-7-40K	7952	112	B4-U0-G1	8236	116	9017	127	P	B1-U0-G2	4757	67	B0-U0-G1	8449	119	P	B2-U0-G2	4686	66	B0-U0-G2	8307	117	P	B2-U0-G2	8520	120	P	B3-U0-G2	71
NV-1-32L-7-50K	8236	116	B4-U0-G1	8520	120	9159	129	P	B2-U0-G2	5041	71	B0-U0-G2	8875	125	P	B2-U0-G2	4970	70	B0-U0-G2	8733	123	P	B2-U0-G2	8946	126	P	B3-U0-G2	71
NV-1-32L-1-30K	11448	108	B4-U0-G1	11872	112	11660	110	S	B2-U0-G2	6678	63	B0-U0-G2	12084	114	S	B2-U0-G2	6572	62	B0-U0-G2	11820	112	S	B2-U0-G2	12190	115	S	B4-U0-G2	106
NV-1-32L-1-40K	11872	112	B4-U0-G1	12296	116	12932	122	P	B2-U0-G2	7102	67	B0-U0-G2	13038	123	P	B2-U0-G2	6996	66	B0-U0-G2	12826	121	P	B3-U0-G2	13144	124	P	B4-U0-G2	106
NV-1-32L-1-50K	12296	116	B4-U0-G1	12720	120	13568	128	P	B2-U0-G2	7526	71	B0-U0-G2	13674	129	P	B3-U0-G3	7420	70	B0-U0-G2	13462	127	P	B3-U0-G3	13780	130	P	B4-U0-G2	106
NV-1-48L-7-30K	11232	108	B4-U0-G1	11648	112	11440	110	S	B2-U0-G2	6552	63	B0-U0-G2	11440	110	S	B2-U0-G2	6448	62	B0-U0-G2	11336	109	S	B2-U0-G2	11544	111	S	B4-U0-G2	104
NV-1-48L-7-40K	11648	112	B4-U0-G1	12064	116	13208	127	P	B2-U0-G2	6968	67	B0-U0-G2	12376	119	P	B2-U0-G2	6864	66	B0-U0-G2	12168	117	P	B2-U0-G2	12480	120	P	B4-U0-G2	104
NV-1-48L-7-50K	12064	116	B4-U0-G1	12480	120	13520	130	P	B2-U0-G2	7384	71	B0-U0-G2	13000	125	P	B3-U0-G3	7280	70	B0-U0-G2	12792	123	P	B2-U0-G2	13104	126	P	B4-U0-G2	104
NV-1-48L-1-30K	16848	108	B5-U0-G1	17472	112	17160	110	S	B3-U0-G3	9828	63	B1-U0-G2	17784	114	S	B3-U0-G3	9672	62	B1-U0-G2	17472	112	S	B3-U0-G3	17940	115	S	B4-U0-G2	156
NV-1-48L-1-40K	17472	112	B5-U0-G1	18096	116	19032	122	P	B3-U0-G3	10452	67	B1-U0-G2	19188	123	P	B3-U0-G3	10296	66	B1-U0-G2	18876	121	P	B3-U0-G3	19344	124	P	B5-U0-G3	156
NV-1-48L-1-50K	18096	116	B5-U0-G1	18720	120	19968	128	P	B3-U0-G3	11076	71	B1-U0-G2	20124	129	P	B3-U0-G3	10920	70	B1-U0-G2	19812	127	P	B3-U0-G3	20280	130	P	B5-U0-G3	156
NV-1-64L-7-30K	14688	108	B5-U0-G1	15232	112	14960	110	S	B2-U0-G2	8568	63	B0-U0-G2	14960	110	S	B3-U0-G3	8432	62	B1-U0-G2	14824	109	S	B3-U0-G3	15096	111	S	B4-U0-G2	136
NV-1-64L-7-40K	15232	112	B5-U0-G1	15776	116	17272	127	P	B3-U0-G3	9112	67	B0-U0-G2	16184	119	P	B3-U0-G3	8976	66	B1-U0-G2	15912	117	P	B3-U0-G3	16320	120	P	B4-U0-G2	136
NV-1-64L-7-50K	15776	116	B5-U0-G1	16320	120	17680	130	P	B3-U0-G3	9656	71	B1-U0-G2	17000	125	P	B3-U0-G3	9520	70	B1-U0-G2	16728	123	P	B3-U0-G3	17136	126	P	B4-U0-G2	136
NV-1-64L-1-30K	22140	108	B5-U0-G1	22960	112	22550	110	S	B3-U0-G3	12915	63	B1-U0-G2	23370	114	S	B3-U0-G3	12710	62	B1-U0-G3	22960	112	S	B3-U0-G3	23575	115	S	B5-U0-G3	205
NV-1-64L-1-40K	22960	112	B5-U0-G1	23780	116	25010	122	P	B3-U0-G3	13735	67	B1-U0-G3	25215	123	P	B3-U0-G3	13530	66	B1-U0-G3	24805	121	P	B3-U0-G4	25420	124	P	B5-U0-G3	205
NV-1-64L-1-50K	23780	116	B5-U0-G1	24600	120	26240	128	P	B3-U0-G3	14555	71	B1-U0-G3	26445	129	P	B3-U0-G3	14350	70	B1-U0-G3	26035	127	P	B3-U0-G4	26650	130	P	B5-U0-G3	205

***DLC** S= Standard P= Premium

EPA

EPA	SGL	D90	D180	T90	T120	QD
NV-1-ASA	0.75	1.29	1.50	1.99	2.05	1.99

L70/L90 DATA

TEMP.	NV-1	
	L70 (64L-1050mA)	L90 (64L-1050mA)
25°C	483,000	160,000

MOUNTING OPTIONS

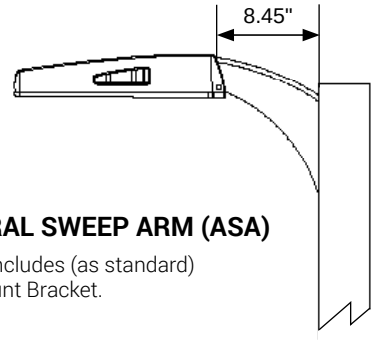

ARCHITECTURAL SWEEP ARM (ASA)

Cast Sweep Arm includes (as standard)
Internal Quick Mount Bracket.

NLS LIGHTING
701 Kingshill Place, Carson, CA 90746
Call Us Today (310) 341-2037
nlslighting.com